

# QuietGuard

## Acoustic 64 Special Application Door




### Special Application High Performance Door Model #QS-64-SAHP



#### Features

Noise Barriers, LLC. is your turnkey provider for all sound control door needs.

- Custom cam-lift hinges and hardware are factory installed.
- Adjustable mortised bottom seals that allow the door to adapt to most site floor conditions are factory installed.
- Triple magnetic seals at head and jambs are factory installed.
- Split-frame door assembly allows installation into existing openings.
- Available in single-leaf, double-leaf designs.
- Door is pre-hung in the factory prior to shipping after seals and hardware have been installed.
- Finish is Galvanneal steel, prime painted.
- Door leaf is 5" thick and weight is 470 lbs.

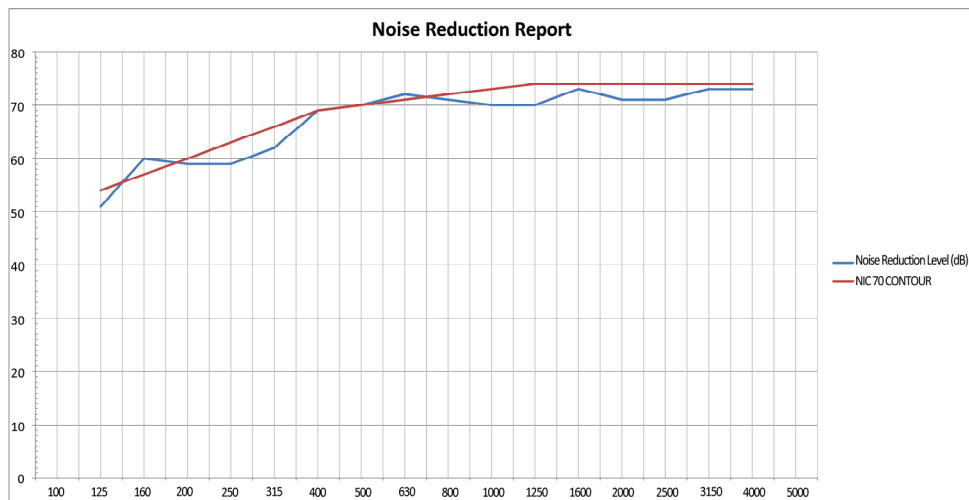

#### Acoustic Performance Data

	1/3 Octave Band Center Frequency, Hz																						
	50	63	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k	NIC	
Sound Transmission Loss Data, dB																							
QS-64-SAHP	27	29	41	51	51	60	59	59	62	69	70	72	71	70	70	73	71	71	73	73	71	70	70

This is an NIC 70. Field testing results may vary due to Room Size, Configuration, and Room Acoustics.



[www.noisebarriers.com](http://www.noisebarriers.com)

2001 Kelley Court  
 Libertyville, IL 60048  
 Phone: (847) 843-0500  
 Fax: (847) 843-0501